



# INCRETE

## Stamped Concrete System



RESIDENTIAL, COMMERCIAL, PUBLIC WORKS & MORE

100+ STANDARD TEXTURES/PATTERNS

DUPLICATE NATURAL SLATE, STONE, GRANITE, BRICK & WOOD

EXTERIOR OR INTERIOR APPLICATION

OVER 900 COLOR COMBINATIONS

EASY TO MAINTAIN

CUSTOM COLORS, PATTERNS, TEXTURES AVAILABLE



INCRETE

# Patterns and Textures

*Second only to nature*

**Increte** stamped concrete is extremely popular, because it replicates the beauty of nature at a fraction of the cost of natural materials. With over 100 patterns and 900 color combinations, the possibilities are unlimited whether you are blending with surrounding landscape elements or creating a unique, one-of-a-kind appearance. By applying special coloring effects to the surface, patterns come to life with realistic color and texture variations. Creative and complex designs bring interest to otherwise bland concrete. Sealing stamped concrete not only intensifies the color but increases protection against weather and wear. Increte stamped concrete is a sturdy, durable, easy-to-maintain surface with superior longevity when compared to conventional concrete or pavers. Beautify any driveway, walkway, patio, deck, shopping center or courtyard with the Increte stamped concrete system.



**Increte** stamped concrete transforms gray, standard concrete into a work of art. Natural-looking color variations and patterns enhance and beautify residential, commercial, civic, and municipal decorative projects around the world. The unique system duplicates nature's texture with incredible realism and excellent durability.



**Ideal for: Driveways | Sidewalks | Entryways | Patios | Pool Decks | And more!**

## AN ENGINEERED SYSTEMS APPROACH

PRODUCT	DESCRIPTION	QUANTITY	COVERAGE
<b>COLOR-CRETE</b> INTEGRAL COLOR	Liquid and powder forms available in 35 standard colors. Provides intense, uniform color to concrete. Custom colors are available.	Liquid in 1 yd <sup>3</sup> (0.7 m <sup>3</sup> ) increments Powder in 1.5 & 25 lb (0.45, 2.2 & 11.3 kg) weights	
<b>COLOR HARDENER</b>	Ready-to-use, dry-shake surface hardener for coloring and hardening freshly poured concrete. Available in 30 standard colors.	60 lbs (27.2 kg)	70-100 ft <sup>2</sup> (6.9 m <sup>2</sup> )
<b>ANTIQUÉ RELEASE</b>	Stamp-tool release agents that enhance color and easily free stamping tools from new concrete. Available in 30 standard colors.	Antique Rel. 35 lb (16 kg) Color Rel. 20 lb (9 kg)	800-1,000 ft <sup>2</sup> (74-93 m <sup>2</sup> ) 800-1,000 ft <sup>2</sup> (74-93 m <sup>2</sup> )
<b>INCRETE DELAY/TROWEL GLIDE</b>	Stamped concrete surface retardant that prevents rapid moisture loss from concrete surface.	1 gal (3.8 L) 5 gal (18.9 L)	1,000-2,000 ft <sup>2</sup> (93-188 m <sup>2</sup> ) 5,000-10,000 ft <sup>2</sup> (464-929 m <sup>2</sup> )
<b>CLEAR SEAL</b>	A clear, non-yellowing, acrylic formula that will protect and enhance the appearance of concrete.	1 gal (3.8 L) 5 gal (18.9 L)	200-400 ft <sup>2</sup> (18-37 m <sup>2</sup> ) 1,000-2,000 ft <sup>2</sup> (93-186 m <sup>2</sup> )
<b>SHUR-GRIP</b>	A colorless, finely-graded, non-slip additive for sealers.	1 lb. (0.45 kg) 15 lb. (6.8 kg)	1,000 ft <sup>2</sup> (93 m <sup>2</sup> ) 15,000 ft <sup>2</sup> (1,393 m <sup>2</sup> )


## PATTERN VARIETIES

Unique custom looks that turn any property into a showplace. With over 100 patterns available, visit our website for a complete listing.

[www.increte.com](http://www.increte.com)

## COLOR COMBINATIONS

Choose from hundreds of color combinations. This color chart is for both Color Hardener and Antique Release. Please refer to Color-Crete Color Chart if using integral color for base color.

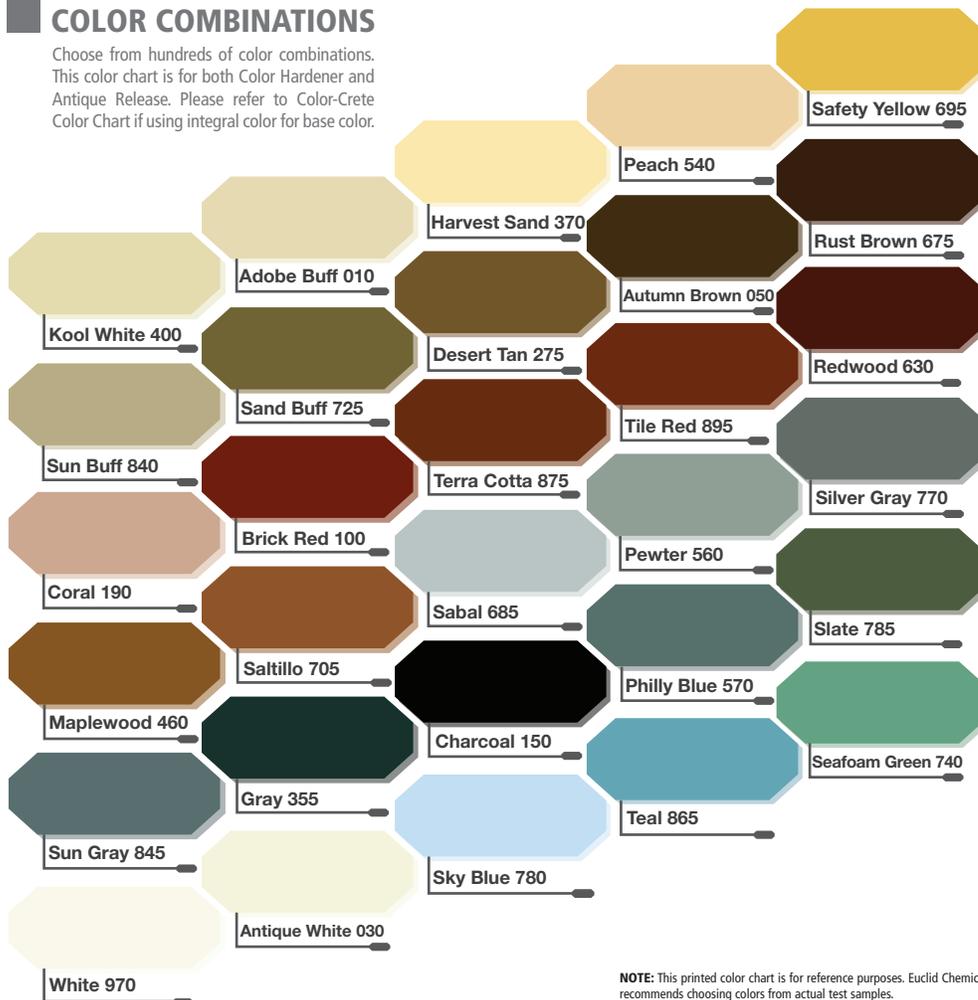

NOTE: This printed color chart is for reference purposes. Euclid Chemical recommends choosing colors from actual test samples.



**EUCLID CHEMICAL**

1611 Gunn Highway  
Odessa, FL 33556  
t 1-800-752-4626  
f 1-813-920-1516

[www.increte.com](http://www.increte.com)

BD03 Increte © 2015 The Euclid Chemical Company. This material is provided for informational purposes only. The Euclid Chemical Company expressly disclaims any liability relating to the use of this material. Nothing stated herein shall give rise to or constitute any warranty by The Euclid Chemical Company, express or implied, including but not limited to any implied warranty of merchantability or fitness for a particular purpose. The information provided in this material is not intended to be all inclusive, as the manner in which any product is used or handled may involve other or additional considerations that are not addressed herein.